


VIBRACHECK FLEX CONNECTOR

FEMALE COPPER SWEAT COUPLING ENDS

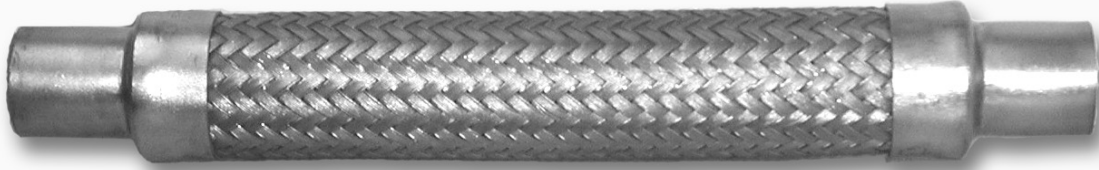

MATERIAL

FLEXIBLE HOSE	P/N DM-7407-001 Thru DM-7407-011	Red Brass
	P/N DM-7407-012 Thru DM-7407-016	A 240 T-321 Stainless
FERRULES	P/N DM-7407-001 Thru DM-7407-011	Copper
	P/N DM-7407-012 Thru DM-7407-016	A 240 T-304 Stainless
TUBE ENDS	All	Copper
WIRE BRAID	P/N DM-7407-001 Thru DM-7407-011	Bronze
	P/N DM-7407-012 Thru DM-7407-016	A 240 T-304 Stainless

PART NO.	TO FIT COPPER TUBING HAVING:		OVERALL LENGTH	WORKING PRESSURE @ 70° F	WEIGHT
	ACTUAL O.D. (IN.)	NOMINAL I.D. (IN.)			
DM-7407-001	1/4	1/8	7	450 PSI	.25
DM-7407-002	1/4	1/8	7-1/2	450 PSI	.25
DM-7407-003	3/8	1/4	8-1/4	450 PSI	.375
DM-7407-004	1/2	3/8	9	450 PSI	.375
DM-7407-005	5/8	1/2	9-3/4	450 PSI	.625
DM-7407-006	3/4	5/8	10	450 PSI	.625
DM-7407-007	3/4	5/8	11-1/4	440 PSI	1.25
DM-7407-008	7/8	3/4	11-1/2	440 PSI	1.25
DM-7407-009	1-1/8	1	13	380 PSI	1.25
DM-7407-010	1-3/8	1-1/4	14-3/4	400 PSI	2.5
DM-7407-011	1-5/8	1-1/2	17	400 PSI	3.75
DM-7407-012	2-1/8	2	20	390 PSI	5
DM-7407-013	2-5/8	2-1/2	24	340 PSI	8
DM-7407-014	3-1/8	3	27	300 PSI	11
DM-7407-015	3-5/8	3-1/2	32-5/8	175 PSI*	14
DM-7407-016	4-1/8	4	33-3/8	175 PSI*	16

* U.L. AND C.S.A. APPROVED FOR LOW SIDE (SUCTION SIDE) USE ONLY.

DME, Incorporated

14001 Marquardt Ave., Santa Fe Springs, CA 90670

(562) 921-0464 FAX: (562) 802-7489

WWW.DMEEXPANSIONJOINTS.COM